


**JM..**

Ball: Gcr15 Steel, heat treated, HRC56min;  
 precision ground, polished, hard chromium plated  
 Body: Carbon steel zinc plated,chromate treated  
 Race: Steel alloy, zinc plated, chromate treated  
 Sliding contact surfaces: Steel/Steel or  
 Steel/PTFE composite

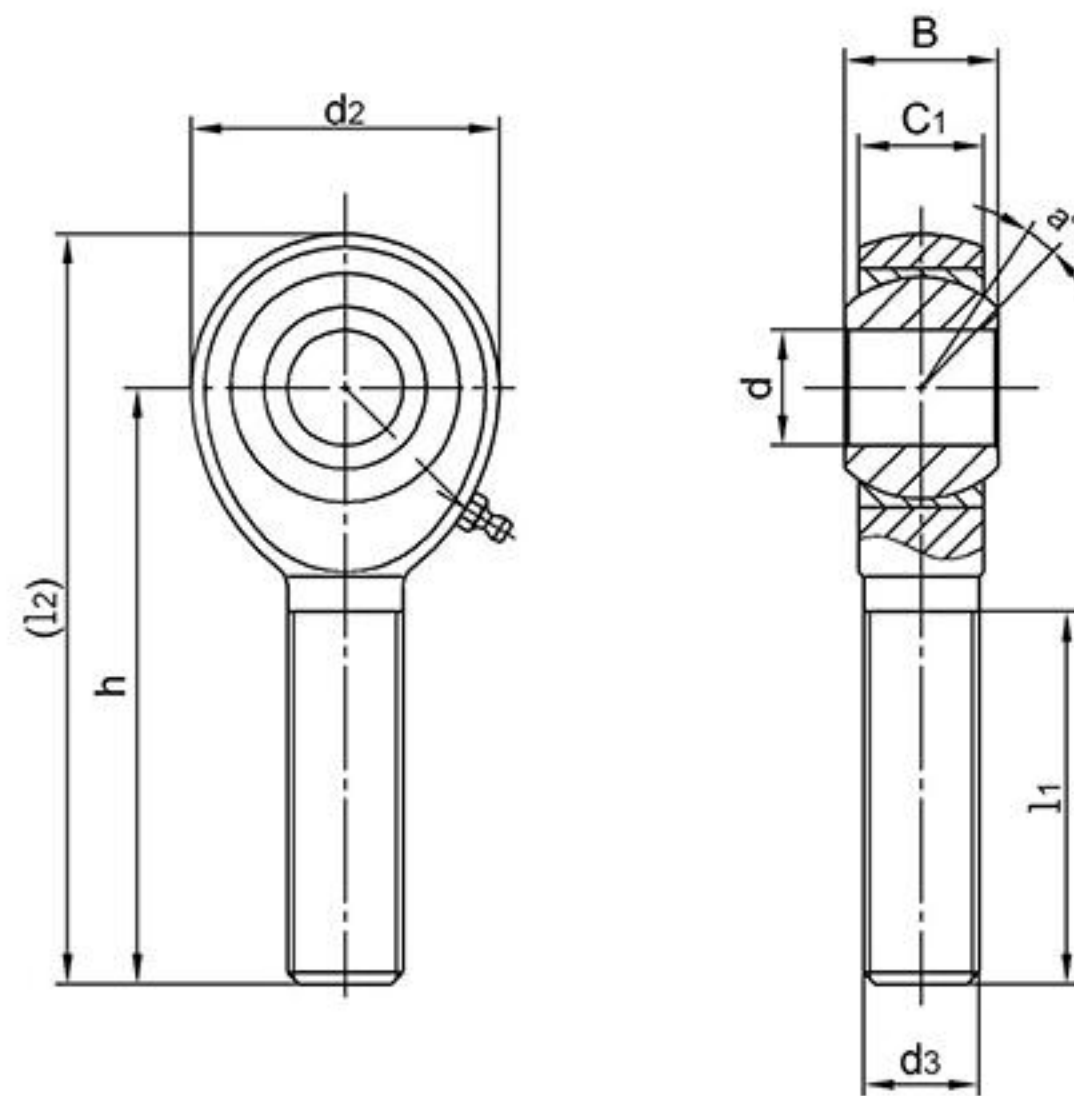

Bearing No.	Dimensions(mm/inches)								Ball dia	a° mis. angle	Load ratings (KN)	weight ≈ kg
	d <sup>+0.038</sup> <sub>-0.012</sub>	B	C <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub> UNF-2A	h	l <sub>1</sub>	(l <sub>2</sub> )				
JM3	4.826	7.92	6.35	15.88	10-32	31.75	19.05	39.69	11.11	10	4.4	0.013
	0.1900	0.312	0.250	0.625		1.250	0.750	1.562	0.437			
JM4	6.35	9.53	7.14	19.05	1/4-28	39.67	25.4	49.2	12.7	13	8.2	0.018
	0.2500	0.375	0.281	0.750		1.562	1.000	1.937	0.500			
JM5	7.938	11.1	8.74	22.23	5/16-24	47.63	31.75	58.75	15.88	10	11.1	0.031
	0.3125	0.437	0.344	0.875		1.875	1.250	2.312	0.625			
JM6	9.525	12.7	10.31	25.4	3/8-24	49.22	31.75	61.92	18.26	9	13.3	0.049
	0.3750	0.500	0.406	1.000		1.938	1.250	2.437	0.719			
JM7	11.112	14.27	11.1	28.58	7/16-20	53.98	34.93	68.27	20.62	11	18.5	0.072
	0.4375	0.562	0.437	1.125		2.125	1.375	2.678	0.812			
JM8	12.7	15.88	12.7	33.32	1/2-20	61.92	38.1	78.58	23.8	9	29.1	0.113
	0.5000	0.625	0.500	1.312		2.438	1.500	3.093	0.937			
JM10	15.875	19.05	14.27	38.1	5/8-18	66.68	41.28	85.73	28.58	11	31.2	0.172
	0.6250	0.750	0.562	1.500		2.625	1.625	3.375	0.937			
JM12	19.05	22.23	17.45	44.45	3/4-16	73.02	44.45	95.25	28.58	10	44.8	0.272
	0.7500	0.875	0.687	1.750		2.875	1.750	3.750	1.125			
JM14	25.4	22.23	17.45	50.8	7/8-14	85.73	47.63	111.1	33.33	10	85	0.408
	0.8750	0.875	0.687	2.000		3.375	1.875	4.375	1.312			
JM16	25.4	34.93	25.4	69.85	5/4-12	104.78	53.98	139.7	47.63	14	155.4	1.091
JM16-1**	1.0000	1.375	1.000	2.750	1-14	4.125	2.125	5.500	1.875			0.964
JM16-2**					12							0.964

Note: For grease fittings add " Z" to suffix. Example: JM6Z  
 For studs add " Y" to suffix. Example: JM5Y  
 For teflon liner add "T" to suffix. Example: JM12T

Can supply rod ends with different pitch or accuracy of thread.

For left-hand thread, suffix"L" is added to bearing numbers. eg.: JML12T 3/4-16L