
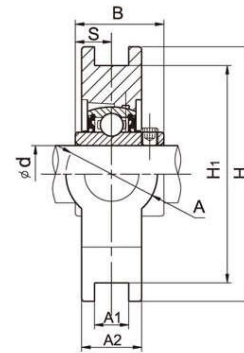


UCST Standard duty, Wider inner ring bearing, Wider slot housing, Setscrew locking

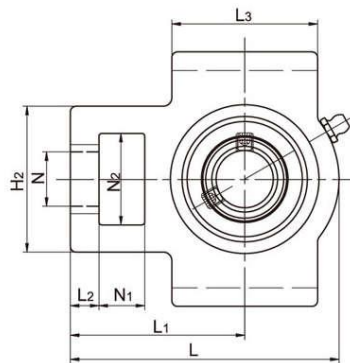

Unit No.	Shaft Dia		Dimensions (mm)														Weight (kg)	
	d		N ₁	L ₂	H ₂	N ₂	N	L ₃	A ₁	H ₁	H	L	A	A ₂	L ₁	B		S
	(in)	(mm)																
UCST201		12																
201-8	1/2	12																
202		15																
202-10	5/8	15	16	10	51	32	19	51	13.5	76	89	94	32	21	61	31	12.7	0.8
203		17																
203-11	11/16	17																
204		20																
204-12	3/4	20																
UCST205		25																
205-14	7/8	25	16	10	51	32	19	51	13.5	76	89	97	32	24	62	34.1	14.3	0.8
205-15	15/16	25																
205-16	1	25																
UCST206		30																
206-17	1-1/16	30	16	10	56	37	22	57	13.5	89	102	113	37	28	70	38.1	15.9	1.26
206-18	1-1/8	30																
206-19	1-3/16	30																
206-20	1-1/4	30																
UCST207		35																
207-20	1-1/4	35																
207-21	1-5/16	35	16	13	64	37	22	64	13.5	89	102	129	37	30	78	42.9	17.5	1.68
207-22	1-3/8	35																
207-23	1-7/16	35																
UCST208		40																
208-24	1-1/2	40	19	16	83	49	29	83	17.5	102	114	144	49	33	88	49.2	19	2.28
208-25	1-9/16	40																
UCST209		45																
209-26	1-5/8	45	19	16	83	49	29	83	17.5	102	117	144	49	35	87	49.2	19	2.52
209-27	1-11/16	45																
209-28	1-3/4	45																
UCST210		50																
210-30	1-7/8	50	19	16	83	49	29	86	17.5	102	117	149	49	37	90	51.6	19	2.75
210-31	1-15/16	50																
210-32	2	50																
UCST211		55																
211-32	2	55	25	19	102	64	35	95	27	130	146	171	64	38	106	55.6	22.2	4.1
211-34	2-1/8	55																
211-35	2-3/16	55																
UCST212		60																
212-36	2-1/4	60	32	19	102	64	35	102	27	130	146	194	64	42	119	65.1	25.4	4.9
212-38	2-3/8	60																
212-39	2-7/16	60																